




UTP CAT5E 24AWG SWA

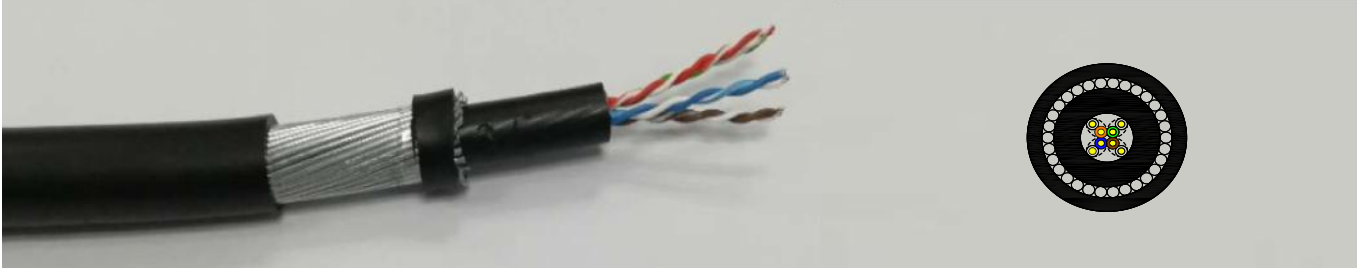

Cable Description

- Conductor : 24AWG Solid bare copper
- Insulation : HDPE
- Inner Sheath : PVC/PE
- Armour : 0.90mm Dipped galvanised steel wire
- Outer Sheath : 12.50mm

Material : PVC/PE

Electrical Characteristics

- Rated Voltage(V) : 30V
- Operating Temperature Rated : -20°C ~ +70°C
- Conductor DCR :Max 9.38 /100m
- Impedance : 100±15

Characteristics

Frequency(MHz)	Attenuation(dB)	RL(dB)	Next Worst Pair(dB)
1.00	2.0	20.0	65.3
4.00	4.1	23.0	56.3
8.00	5.8	24.5	51.8
10.00	6.5	25.0	50.3
16.00	8.2	25.0	47.3
20.00	9.3	25.0	45.8
25.00	10.4	24.3	44.3
31.25	11.7	23.6	42.9
62.50	17.0	21.5	38.4
100.00	22.0	20.1	35.3