




## FTP CAT.5E Patch Cord

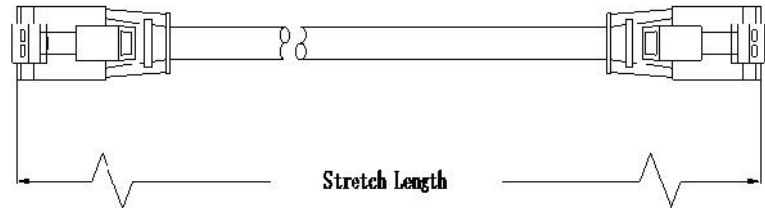

### Cable Description

- Conductor : 24/26AWG, Stranded Bare Copper
- Insulation : HDPE ,4Pair
- Al-foil + Drain
- Sheath : PVC/LSZH
- Shielded RJ45 plug

### Network Applications

- Operating Temperature Rated : -20 °C ~ +80 °C
  - Standards : EIA/TIA 568-C.2  
ISO 11801 Edition 2 CLASS D
- Impedance : 100±15

### Characteristics

Frequency(MHz)	RL(dB)	Next Worst Pair(dB)
1.00	20.0	65.3
4.00	23.0	56.3
8.00	24.5	51.8
10.00	25.0	50.3
16.00	25.0	47.3
20.00	25.0	45.8
25.00	24.2	44.3
31.25	23.3	42.9
62.50	20.7	38.4
100.00	19.0	35.3

Length : 1M/2M/3M/5M/10M/20M/25M/30M