




Flat Twin & Earth

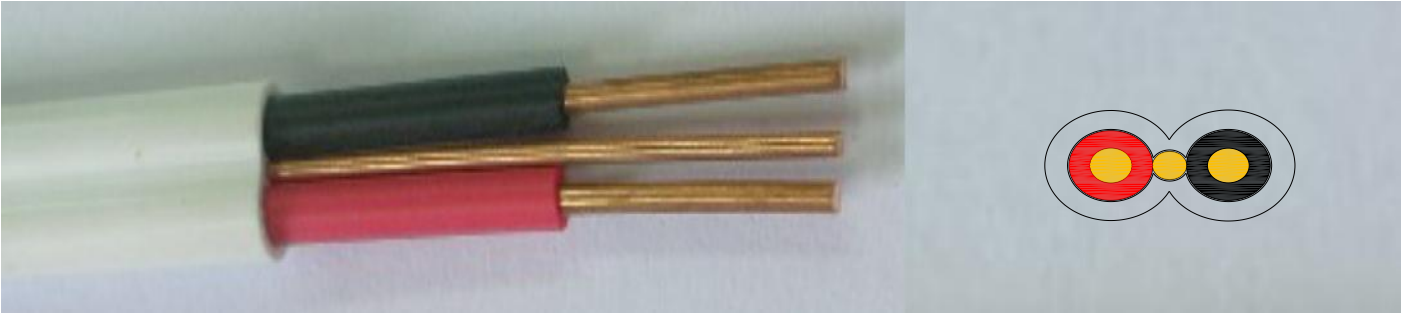

Cable Description

- Conductor : Solid bare copper
- Insulation : PVC
- Earth : Solid bare copper
- Sheath : PVC
- Sheath color : White

Electrical Characteristics

- Rated Voltage(V) : 300V/500V
- Operating Temperature Rated : -20°C ~ +70°C
- Minimum bending radius : 10×OD

Product Specification

Part No.	No.of cores	Conductor Diameter (mm)	Insulation Diameter (mm)	Earth Diameter (mm)	Sheath Diameter(mm)	Max Conductor Resistance(Ω/km)
FTE 1.5/3C	2	BC1.40	2.8	BC1.13	4.80×8.20	13.3
FTE 2.5/3C	2	BC1.80	3.4	BC1.40	5.20×10.0	7.98
FTE 4.0/3C	2	BC2.30	3.9	BC1.40	5.70×11.0	4.95
FTE 6.0/3C	2	BC2.76	4.4	BC1.80	6.40×12.50	3.30