




## MINI RG59

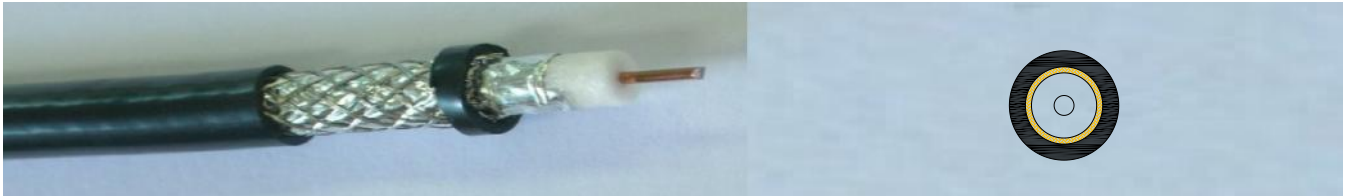

### Cable Description

- Conductor : Solid copper clad steel  
CS0.41mm
- Insulation : 1.90mm FPE
- Shield : Bonded Al-foil shielded
- Braid : Tinned copper braiding, coverage 56%
- Sheath : 3.60mm
- Material : PVC/LSZH
- Color : Black & White

### Electrical Characteristics

- Rated Voltage(V) : 30V
- Operating Temperature Rated : -20°C ~ +70°C
- Conductor DCR :Max 382 /Km
- Velocity ratio : 81%
- Capacitance : 56±3 pF/M
- Impedance : 75±3

- Attenuation at 20°C (-dB/100m)

200MHZ	23.5
400MHZ	32.5
600MHZ	40